

# SR FILTERS™

FIBERGLASS SIDE MOUNT SAND FILTERS WITH VALVES



## FEATURED HIGHLIGHTS

- One-piece, fiberglass reinforced tank with UV resistant coating.
- Easy-to-read top mounted pressure gauge with manual air relief.
- A 360° diffuser to keep the sand bed flat for optimum filtration, has a “swing-away” design for instant access to sand.
- Easy-to-use water drain for simplified service and winterizing.
- All filter fittings are threaded for easy servicing.

## ORDERING INFORMATION

Model	Filter (mm) Ø	Recommended flow rate (m3/h)	Filter Area (m2)	Flange connection	Sand 0.4 - 0.8 mm (kg)	Gravel 3 - 5 mm (kg)	Clearance distance (mm)	Maximum working pressure (bar)	Valve <sup>1</sup> / Ref.
-------	---------------	------------------------------	------------------	-------------------	------------------------	----------------------	-------------------------	--------------------------------	---------------------------

### SR Filters

SR-480	480	8,5	0,17	1 1/2"	52	20	825	3,5	6-way / RE261070ND
SR-600	610	14	0,29	1 1/2"	108	40	955	3,5	6-way / RE261070ND
SR-760	762	22	0,45	2"	200	80	1095	3,5	6-way / RE261071ND
SR-910	914	32	0,64	2"	310	120	1200	3,5	6-way / RE261071ND


1 Valve included

Model	Length (cm)	Width (cm)	Height (cm)	Gross Weight (kg)	Pcs by pallet	Length pallet (cm)	Width pallet (cm)	Height pallet (cm)
-------	-------------	------------	-------------	-------------------	---------------	--------------------	-------------------	--------------------

### SR Filters

SR-480	49	49	88	13,4	8	98	98	189
SR-600	63	63	102	18,4	8	126	126	218
SR-760	78	78	120	29,8	4	156	156	134
SR-910	94	94	106	35,5	2	95	95	220

## DIMENSIONS

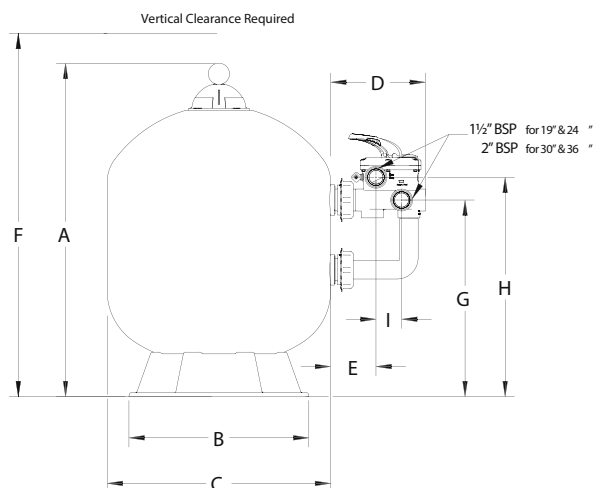

	SR-480	SR-600	SR-760	SR-910
A	825	955	1095	1200
B	400	400	610	610
C	480	610	762	914
D	252	252	302	302
E	120	120	160	160
F	876	1006	1146	1251
G	463	530	590	657
H	524	592	671	738
I	70	70	70	70